

**Final
Site-Specific Safety and Health Plan Attachment
Former 81mm Mortar Range, Parcel 137Q-X**

**Fort McClellan
Calhoun County, Alabama**

Prepared for:

**U.S. Army Corps of Engineers, Mobile District
109 St. Joseph Street
Mobile, Alabama 36602**

Prepared by:

**IT Corporation
312 Directors Drive
Knoxville, Tennessee 37923**

**Task Order CK10
Contract No. DACA21-96-D-0018
IT Project No. 796887**


April 2002

The following Site-Specific Safety and Health Plan (SSHP) has been designed for the methods presently contemplated by IT Corporation (IT) for execution of the proposed work. Therefore, the SSHP may not be appropriate if the work is not performed by or using the methods presently contemplated by IT. In addition, as the work is performed, conditions different from those anticipated may be encountered and the SSHP may have to be modified. Therefore, IT only makes representations or warranties as to the adequacy of the SSHP for currently anticipated activities and conditions.

This Site-Specific Safety and Health Plan must be used in conjunction with the Installation-Wide Safety and Health Plan and Installation-Wide Ordnance and Explosives Management Plan, Fort McClellan, Alabama.


**Site-Specific Safety and Health Plan Attachment Approval
Fort McClellan, Calhoun County, Alabama**

I have read and approve this site-specific safety and health plan (SSHP) attachment for the Former 81mm Mortar Range, Parcel 137Q-X, Fort McClellan, Alabama, with respect to project hazards, regulatory requirements, and IT Corporation procedures.

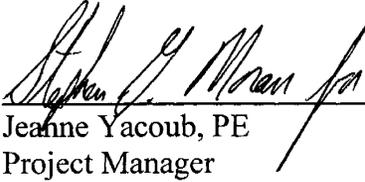


Jeanne Yacoub, PE
Project Manager

4/10/02
Date

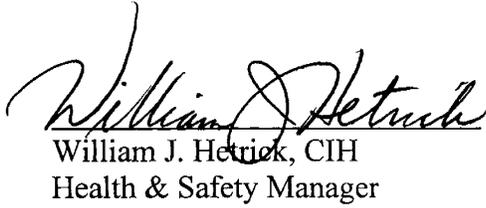

William J. Hetrick, CIH
Health & Safety Manager

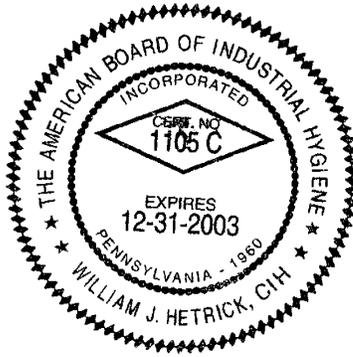

4/11/02
Date



Jeff Farr
Site Coordinator


4/10/02
Date

Acknowledgements

The approved version of this site-specific safety and health plan (SSHP) attachment for the Former 81mm Mortar Range, Parcel 137Q-X, Fort McClellan, Calhoun County, Alabama has been provided to the site coordinator. I acknowledge my responsibility to provide the site coordinator with the equipment, materials, and qualified personnel to implement fully all safety requirements in this SSHP attachment. I will formally review this plan with the health and safety staff every 6 months until project completion.




Project Manager



Date

I acknowledge receipt of this SSHP attachment from the project manager, and that it is my responsibility to explain its contents to all site personnel and cause these requirements to be fully implemented. Any change in conditions, scope of work, or other change that might affect worker safety requires me to notify the project manager and the health and safety manager.

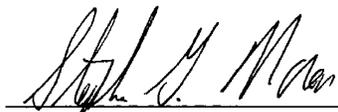

Site Coordinator



Date

Fort McClellan Gate Hours

Galloway Gate	Galloway Road. Open 6 am to 6 pm Monday through Friday
Baltzell Gate	Baltzell Road. Open 24 hours daily, 7 days a week.

Fort McClellan Project Emergency Contacts

Range Control Office (Main Post)	(256) 848-6772
Fire Department (off post)	911
Ambulance (off post)	911
Regional Medical Center	(256) 235-5121
Military Police (SSG Busch)	(256) 848-5680, 848-4824
DOD Guard Force (Mr. Bolton)	(256) 848-5680, 848-4732
Anniston Police Department	(256) 238-1800
Chemical Agent Emergencies	(256) 895-1598
(Mike Smith, CEHNC)	cell phone (256) 759-3931
UXO Emergencies	(256) 895-1598
(Mike Smith, CEHNC)	cell phone (256) 759-3931
UXO Non emergencies/Reporting Only (Ronald Levy)	(256) 848-6853
Baltzell Gate Guard Shack	(256) 848-5693, 848-3821
National Response Center & Terrorist Hotline	(800) 424-8802
Poison Control Center	(800) 222-1222
EPA Region IV	(404) 562-8725
Ronald Levy, Chief, FTMC Environmental Management	(256) 848-6853
Ellis Pope, U.S. Army Corps of Engineers	(251) 690-3077
Jeanne Yacoub, IT Project Manager	(770) 663-1429
Bill Hetrick, IT H&S Manager	(865) 690-3211, and pager (888) 655-9529
Jeff Tarr, IT Site Manager	(256) 848-3482, 3499
Mike Moore, Fort McClellan Safety Office	(256) 848-5433
Dr. Jerry H. Berke, Health Resources Occupational Physician	(800) 350-4511

Table of Contents

	Page
List of Tables	ii
List of Figures	ii
1.0 Site Work Plan Summary	1
2.0 Site Characterization and Analysis	3
2.1 Anticipated Hazards	3
2.2 General Site Information	3
3.0 Personal Protective Equipment	5
4.0 Site Monitoring	7
5.0 Activity Hazard Analysis	8

Attachment 1 – Evaluating OE/UXO/CWM in Support of HTRW Activities

List of Tables

Number	Title	Follows Page
2-1	Toxicological and Physical Properties of Chemicals	3
4-1	Action Levels	7
4-2	Air Monitoring Frequency and Location	7
5-1	Activity Hazard Analysis	8

List of Figures

Figure	Title	Follows Page
1-1	Organization Chart	2
5-1	Hospital Route Map	8

1.0 Site Work Plan Summary

Project Objective. In accordance with Contract Number DACA21-96-D-0018, Task Order CK10, IT Corporation (IT) will conduct site investigation activities at the Former 81mm Mortar Range, Parcel 137Q-X, at Fort McClellan (FTMC), Calhoun County, Alabama, to determine the presence or absence of potential site-specific chemicals (PSSC) at this site.

IT will collect 15 surface soil samples, 15 subsurface soil samples, 4 groundwater samples, 5 surface water and sediment samples, and 1 depositional soil sample. Potential contaminant sources at the Impact Area, Parcel 137Q-X, are primarily unknown but may include explosives and metals. Chemical analyses of the samples collected during the field program will include nitroaromatic/nitramine explosives and metals. A select number of samples will be analyzed for semivolatile and volatile organic compounds, chlorinated and organophosphorous pesticides, and chlorinated herbicides.

The scope of work for activities associated with the sampling at the Former 81mm Mortar Range, Parcel 137Q-X, site investigation, includes the following tasks:

- Conduct a surface and near-surface UXO survey over all areas to be included in the sampling effort.
- Provide downhole UXO support for all intrusive drilling to determine buried downhole hazards.
- Collect sufficient soil, water, groundwater, and sediment samples to determine whether PSSCs are present at the Former 81mm Mortar Range, Parcel 137Q-X, and to provide data useful for supporting any future planned corrective measures and closure activities.
- Equipment decontamination.

Attachment 1, *Evaluating Ordnance and Explosive (OE)/UXO/chemical warfare materials (CWM) Hazards in Support of HTRW Activities*, confirm that the historical records available for the sites have been reviewed and that UXO support is required for all site activities.


UXO surface sweeps and downhole surveys of soil borings will be required to support field activities at this site. The surface sweeps and downhole surveys will be conducted to identify anomalies for the purpose of UXO avoidance. The site-specific UXO safety plan will be used to support sample collection activities for the site investigation, if incidental ordnance, explosives, and UXO are encountered and require avoidance.

Personnel Requirements. Up to 10 employees are anticipated for this scope of work. See Figure 1-1 or the organization chart.

Note: All personnel on this site shall have received training, informational programs, and medical surveillance as outlined in the installation-wide safety and health plan (SHP) for site investigations at FTMC, and be familiar with the requirements of this site-specific safety and health plan (SSHP). This SSHP must be used in conjunction with the installation-wide SHP, the site-specific UXO safety plan, and its counterpart, the installation-wide OE management plan for FTMC, Alabama.

Figure 1-1

Organization Chart
Site Investigation
Former 81mm Mortar Range, Parcel 137Q-X
Task Order #CK10
Fort McClellan
Contract #DACA21-96-D-0018

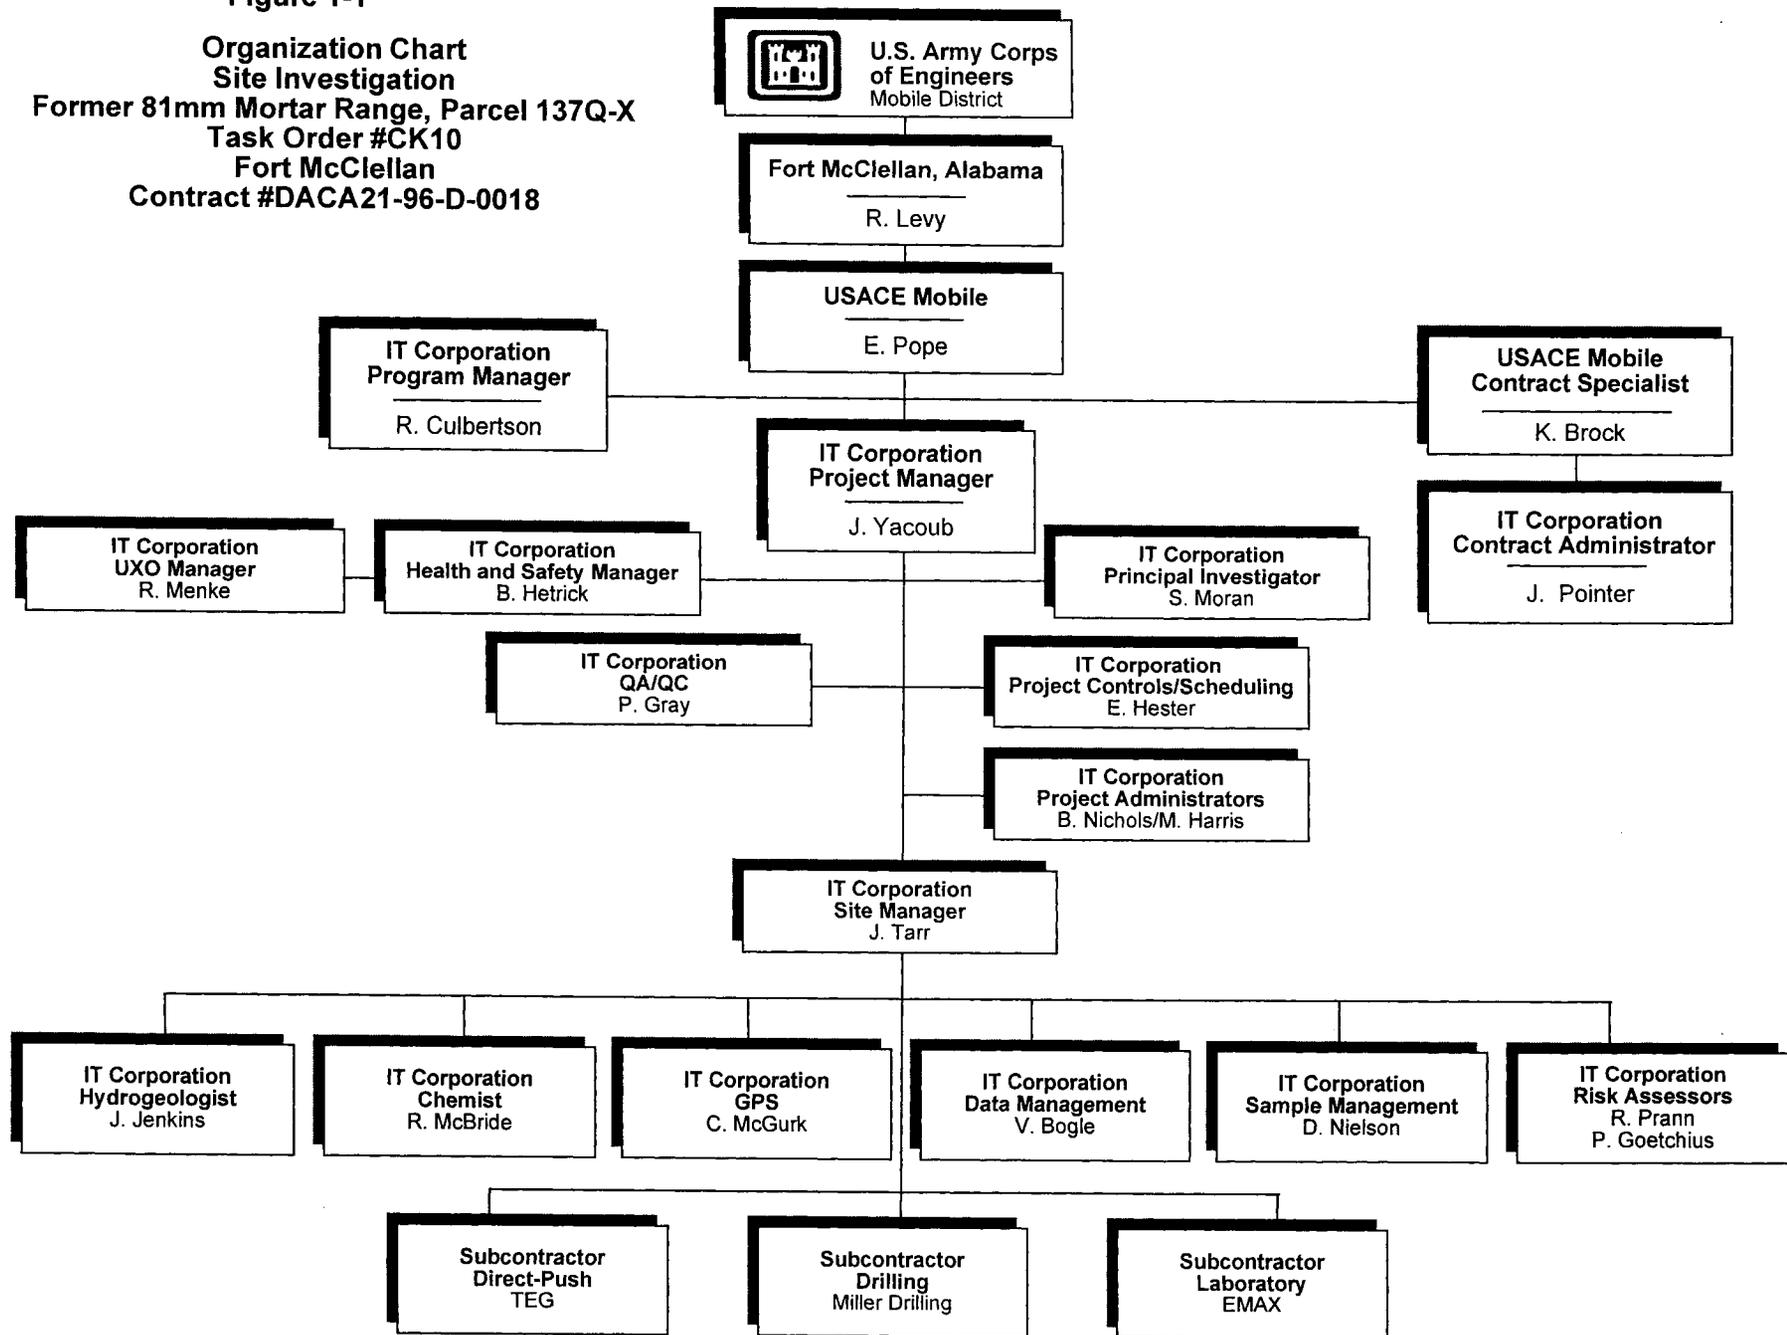

2.0 Site Characterization and Analysis

2.1 Anticipated Hazards

The activity hazard analysis in Chapter 5.0 contains project-specific practices utilized to reduce or eliminate anticipated site hazards. The activity hazard analysis indicates specific chemical and physical hazards that may be present and encountered during each task from on-site operations. Below each task is a list of hazards and specific actions that will be taken to control the respective hazards. These control measures may include work practice controls, engineering controls, and/or use of appropriate personal protective equipment (PPE). Site control with the use of specific work zones (support zone, contamination reduction zone, and exclusion zone) is addressed in Chapter 7.0 of Appendix A of the *Final Installation-Wide Sampling and Analysis Plan, Fort McClellan, Calhoun County, Alabama* (IT, 2002a).

Potential contaminant sources at the Former 81mm Mortar Range, Parcel 137Q-X, are primarily lead and explosives. Chemical analyses of the samples collected during the field program will include nitroaromatic/nitramine explosives and metals. A select number of samples will be analyzed for semivolatile and volatile organic compounds, chlorinated and organophosphorous pesticides, and chlorinated herbicides.

Procedures contained in the site-specific UXO safety plan shall be followed for all site activities associated with this investigation.

Table 2-1 contains the toxicological and physical properties of chemicals anticipated to be present at the Former 81mm Mortar Range, Parcel 137Q-X.

2.2 General Site Information

Location of Site. FTMC is located in the foothills of the Appalachian Mountains of northeastern Alabama near the cities of Anniston and Weaver in Calhoun County. FTMC is approximately 60 miles northeast of Birmingham, 75 miles northwest of Auburn and 95 miles west of Atlanta, Georgia. FTMC consists of three main areas of government-owned and leased properties: Main Post, Pelham Range, and Choccolocco Corridor (lease terminated in May 1998).

The Former 81mm Mortar Range, Parcel 137Q-X, is located in the northeast corner of the Main Post at FTMC (see Figure 1-1 in the site-specific field sampling plan [SSFSP]).

Table 2-1

Toxicological and Physical Properties of Chemicals
 Impact Area, Parcel 136Q-X
 Fort McClellan, Calhoun County, Alabama

(Page 1 of 4)

Substance [CAS]	IP ^a (eV)	Odor Threshold (ppm)	Route ^b	Symptoms of Exposure	Treatment	TWA ^c	STEL ^d	Source ^e	IDLH (NIOSH) ^f
Arsenic [7440-38-2]	None	None	Inh Ing Con	Cough, diarrhea, shortness of breath, vomiting, grey skin. Redness	Eye: Irrigate immediately Skin: Soap wash immediately Breath: Respiratory support Swallow: Immediate medical attention	0.01 mg/m ³ 0.01 mg/m ³	(Ca) 0.002 mg/m ³	PEL TLV REL	5 mg/m ³
Antimony [7440-36-0]	None	None	Inh Ing Con	Coughing, abdominal pain, burning sensation, vomiting, diarrhea,	Eye: Irrigate immediately Skin: Soap wash immediately Breath: Respiratory support Swallow : Immediate medical attention	0.5 mg/m ³ 0.5 mg/m ³ 0.5 mg/m ³		PEL TLV REL	50 mg/m ³
Barium [7440-39-3]	None	None	Inh Ing Con	Cough, sore throat Redness	Eye: Irrigate immediately Skin: Soap wash immediately Breath: Respiratory support Swallow: Immediate medical attention	0.5 mg/m ³ 0.5 mg/m ³ 0.5 mg/m ³		PEL TLV REL	NA
Fuel oil (diesel oil, medium)	None	None	Ing Inh Con	Ingestion causes nausea, vomiting, and cramps; depressed central nervous system, headache, coma, death; pulmonary irritation; kidney and liver damage; aspiration causes severe lung irritation, coughing, gagging, dyspnea, substernal stress, pulmonary edema; broncho- pneumonia; excited, then depressed, central nervous system.	Eye: Irrigate promptly Skin: Soap wash Breath: Respiratory support Swallow: Immediate medical attention Aspiration: Immediate medical attention	None		PEL TLV REL	

Table 2-1

Toxicological and Physical Properties of Chemicals
 Impact Area, Parcel 136Q-X
 Fort McClellan, Calhoun County, Alabama

(Page 2 of 4)

Substance [CAS]	IP ^a (eV)	Odor Threshold (ppm)	Route ^b	Symptoms of Exposure	Treatment	TWA ^c	STEL ^d	Source ^e	IDLH (NIOSH) ^f
Gasoline [8006-61-9]	None	0.3	Inh Ing Con	Intoxication, headaches, blurred vision, dizziness, nausea; eye, nose throat irritation; potential kidney and other cancers. Carcinogenic.	Eye: Irrigate immediately (15 min) Skin: Soap wash promptly Breath: Respiratory support Swallow: Immediate medical attention	- 300 ppm Ca, lowest feasible conc. (LOQ 15 ppm)	- 500 ppm	PEL TLV REL	1400 ppm (10% LEL)
Lead {7439-92-1}	None	None	Inh Ing Con	Lightheadedness; nausea, headache; numbness of the extremities, muscular weakness; irritation of the eyes and nose; dermatitis; chemical pneumonia; giddiness.	Eye: Irrigate immediately Skin: Soap wash immediately Breath: Respiratory support Swallow: Immediate medical attention	0.05 mg/m ³ 0.05 mg/m ³ 0.10 mg/m ³		PEL TLV REL	100 mg/m ³
Isopropyl alcohol (isopropanol) [67-63-0]	10.16	43-200	Inh Ing Con	Mild irritation of the eyes, nose, and throat; drowsiness, dizziness, headache; dry, cracked skin.	Eye: Irrigate immediately Skin: Water flush Breath: Respiratory support Swallow: Immediate medical attention	400 ppm 400 ppm 400 ppm	500 ppm 500 ppm 500 ppm	PEL TLV REL	2,000 ppm
Motor Oil [NA]	None	None	Inh Ing	Irritated eyes, skin, respiratory system; usually only a problem if misted or ingested.	Eye: Irrigate immediately (15 min) Skin: Soap wash immediately Swallow: Immediate medical attention	None		PEL TLV REL	
Nitric acid [7697-37-2]	11.95	0.3-1	Inh Ing Con	Irritated eyes, mucous membranes, and skin; delayed pulmonary edema, pneumonitis, bronchitis; dental erosion.	Eye: Irrigate immediately Skin: Water flush promptly Breath: Respiratory support Swallow: Immediate medical attention	2 ppm 2 ppm 2 ppm	- 4 ppm 4 ppm	PEL TLV REL	25ppm

Table 2-1

**Toxicological and Physical Properties of Chemicals
Impact Area, Parcel 136Q-X
Fort McClellan, Calhoun County, Alabama**

(Page 3 of 4)

Substance [CAS]	IP ^a (eV)	Odor Threshold (ppm)	Route ^b	Symptoms of Exposure	Treatment	TWA ^c	STEL ^d	Source ^e	IDLH (NIOSH) ^f
Nitroglycerin [55-63-0]	None	None	Inh Ing Con	Abdominal cramps, blue lips and fingernails, dizziness, headache, labored breathing	Eye: Irrigate immediately Skin: Soap wash immediately Breath: Respiratory support Swallow: Immediate medical attention	- 0.46 mg/m ³ skin	2 mg/m ³ skin . .1 mg/m ³ skin	PEL TLV REL	75 mg/m ³
Sodium hydroxide [1310-73-2]	None	None	Inh Ing Con	Irritated nose; pneumonitis; burns eyes, and skin; temporary loss of hair.	Eye: Irrigate immediately Skin: Water flush immediately Breath: Respiratory support Swallow: Immediate medical attention	2 mg/m ³	- C 2 mg/m ³ C 2 mg/m ³	PEL TLV REL	10 mg/m ³

NOTE: Additional chemical safety information for arsenic, lead, antimony, barium and nitroglycerin follows Table 2-1.

^aIP = Ionization potential (electron volts).

^bRoute = Inh, Inhalation; Abs, Skin absorption; Ing, Ingestion; Con, Skin and/or eye contact.

^cTWA = Time-weighted average. The TWA concentration for a normal work day (usually 8 or 10 hours) and a 40-hour work week, to which nearly all workers may be repeatedly exposed, day after day without adverse effect.

^dSTEL = Short-term exposure limit. A 15-minute TWA exposure that should not be exceeded at any time during a workday, even if the TWA is not exceeded.

^ePEL = Occupational Safety and Health Administration (OSHA) permissible exposure limit (29 CFR 1910.1000, Table Z).

AEL = Airborne Exposure Limit.

TLV = American Conference of Governmental Industrial Hygiene (ACGIH) threshold limit value-TWA.

REL = National Institute for Occupational Safety and Health (NIOSH) recommended exposure limit.

^fIDLH (NIOSH)-Immediately dangerous to life or health (NIOSH). Represents the maximum concentration from which, in the event of respirator failure, one could escape within 30 minutes without a respirator and without experiencing any escape-impairing or irreversible health effects.

NE = No evidence could be found for the existence of an IDLH (NIOSH Pocket Guide to Chemical Hazards, Pub. 1998).

C = Ceiling limit value which should not be exceeded at any time.

Ca = Carcinogen.

NA = Not applicable.

? = Unknown.

LEL = Lower explosive limits.

LC₅₀ = Lethal concentration for 50 percent of population tested.

LD₅₀ = Lethal dose for 50 percent of population tested.

NIC = Notice of intended change (ACGIH).

Table 2-1

Toxicological and Physical Properties of Chemicals Impact Area, Parcel 136Q-X Fort McClellan, Calhoun County, Alabama

(Page 4 of 4)

References:

American Conference of Governmental Industrial Hygienists Guide to Occupational Exposure Values, 2001, compiled by the American Conference of Governmental Industrial Hygienists.
Clayton, George D., Clayton, F. E., Patty's Industrial Hygiene and Toxicology, 3rd ed., John Wiley & Sons, New York.
Documentation of TLVs and BEIs, American Conference of Governmental Industrial Hygienists, 6th ed., 1998.
Lewis, Richard J., Sr., 1992, Sax's Dangerous Properties of Industrial Materials, 8th ed., Van Nostrand Reinhold, New York.
National Institute for Occupational Safety and Health Pocket Guide to Chemicals, Pub. 1998, National Institute for Occupational Safety and Health.
Odor Threshold for Chemicals with Established Occupational Health Standards, American Industrial Hygiene Association, 1989.
Workplace Environmental Exposure Levels, American Industrial Hygiene Association, 1992.

Site Description. The Former 81mm Mortar Range, Parcel 137Q-X, is shown on Plate 6 (1950 to 1973 Range Use) and Plate 10 (Cumulative Map of All Ranges) of the U.S. Army Corps of Engineers July 1999 *Archives Search Report (ASR), Maps, Fort McClellan, Anniston, Alabama*. The ASR records that the range first appears on the 1958 range map, but that by 1967 the range was abandoned. The history of the explosive ordnance used at the Former 81mm Mortar Range, Parcel 137Q-X is unknown; however, an expended 81mm high-explosive mortar round was found on the range during the site visit conducted to complete the ASR (U.S. Army Corps of Engineers, 1999). The ASR maps indicate the safety fan for the range extends to the south and southeast, encompassing approximately 960 acres on the Main Post, and extending an additional 180 acres into Choccolocco Corridor. The site investigation area covers approximately 41 acres of the range (Figure 1-2 in the SSFSP).

During site walks conducted by IT personnel in January 2002, an east-west trending trench approximately 900 feet long was observed running between the two secondary roads that bound the east and west sides of the SI area. Within the trench were numerous surface features, including several one- to five gallon drums, metal debris, and circular pits. In the vicinity of the trench were rusted supertropical bleach drums (positively identified), possible showerheads, possible gas cans, and rusted truck beds. A rusted truck with multiple holes that appeared to have been used for small arms target practice was observed in the southwest portion of the site. Along the western-most unimproved road were one- to five-gallon drums (some corrugated) and a rusted truck bed. In the southeast portion of the site, near the eastern edge of the trench, were several surface depressions that appeared to be foxholes (Figure 1-2 in the SSFSP).

Based on observations at the Former 81mm Mortar Range, Parcel 137Q-X, and review of aerial photographs, the parcel boundary was relocated approximately 600 feet west of the original location. IT conducted several site walks of Parcel 137Q-X. However, IT did not observe any evidence of this area being used as an 81mm mortar range. The ASR did not indicate the location of the high explosive mortar round found at the site.

Duration of Planned Employee Activity. Employee activity duration is anticipated to be less than one month.

Pathways for Hazardous Substance Dispersion. Possible pathways for hazardous substances in the area are surface and subsurface soils.

3.0 Personal Protective Equipment

The work activities will begin in the following levels of protection. Also, a completed description of Level D, Modified Level D, and Level C PPE is provided.

Task	Initial Level of PPE
Surveying	Level D
Initial UXO avoidance sweep and equipment staging	Level D
Surveying	Level D
Utility clearance	Level D
Down-hole UXO avoidance	Modified Level D*
Surface and subsurface direct push soil sampling	Modified Level D*
Equipment decontamination	Modified Level D*

*Initial level will be raised to Level C or higher if air monitoring results in the breathing zone (BZ) are greater than action levels.

Level D. The minimal level of protection that will be required of IT personnel at the site will be Level D. The following equipment will be used for Level D protection:

- Escape/egress air supply pack
- Coveralls or work clothing
- Latex sample gloves are required for collecting the surface soil samples
- Leather work gloves (when necessary)
- Steel-toed safety boots
- Safety glasses
- Hardhat
- Wear hearing protection (when working near/adjacent to operating equipment).

Modified Level D. The following equipment will be used for Level D-Modified protection:

- Escape/egress air supply pack
- Permeable Tyvek®, Kleenguard®, or its equivalent (dry contaminants)
- Poly-coated Tyvek® or Saran® coverall (equipment decontamination/liquid contamination)
- Latex boot covers
- Nitrile, heavy work, or latex gloves

- Steel-toed safety boots
- Safety glasses
- Hardhat
- Hearing protection (when working near/adjacent to operating equipment)
- Full-face shield (as necessary to protect against splash hazards).

Note: In addition to Modified Level D PPE, the operator of high-pressure water jetting equipment (pressure washers) shall wear metatarsal guards for protection of the legs and feet and a face shield for protection from splashes.

Level C. Level C protection will not be used unless air-monitoring data indicate the need for upgrade; however, the equipment shall be readily available on site. The following equipment will be used for Level C protection:

- National Institute of Occupational Safety and Health/Mine Safety and Health Administration-approved full-face, air-purifying respirators equipped with organic vapor/acid gas cartridge in combination with high-efficiency particulate air filter
- Escape/egress air supply pack
- Hooded, Saran[®]-coated Tyvek[®], taped at gloves, boots, and respirator
- Nitrile gloves (outer)
- Latex or lightweight nitrile gloves (inner)
- Neoprene steel-toed boots or polyvinyl chloride overbooties/steel-toed safety boots
- Hardhat
- Hearing protection (when working near/adjacent to operating equipment).

Note: In addition to Level C PPE, the operator of high-pressure water jetting equipment (pressure washers) shall wear metatarsal guards for protection of the legs and feet and a face shield for protection from splashes.

4.0 Site Monitoring

The environmental contaminants of concern resulting from former activities at the Former 81mm Mortar Range, Parcel 137Q-X, are primarily unknown but based on land use history probably include explosives and metals.

Table 4-1 contains action levels for site monitoring at the Former 81mm Mortar Range, Parcel 137Q-X.

Chemical. The site safety and health officer or task geologist shall perform air monitoring during the performance of site activities and ground intrusive operations. A calibrated photo ionization detector (i.e., Hnu DL-101 or equivalent) organic vapor analyzer will be utilized to monitor the sampling locations and BZs to determine if any organic material may be present that would necessitate upgrading of the protection level. A calibrated combustible gas/oxygen indicator will be utilized to monitor the borehole, work areas, and BZs to determine if any combustible/flammable levels may be present that would necessitate evacuation of the work area. A Miniram PDM-3 or equivalent aerosol monitor shall be used to monitor airborne dust, since lead is a potential concern. Table 4-2 contains the air monitoring frequency and location for site monitoring at the Former 81mm Mortar Range, Parcel 137Q-X.

Radiological. Radiation hazards are not anticipated at the Former 81mm Mortar Range, Parcel 137Q-X.

Unexploded Ordnance. UXO support for sampling activities are specified in the site-specific UXO safety plan developed for the Former 81mm Mortar Range, Parcel 137Q-X. The UXO specialists will perform UXO avoidance sweeps prior to moving the heavy equipment onto the site. During this operation, UXO on the surface will be detected and marked for avoidance during field operations. Additionally, downhole magnetometer surveys will be performed to detect metal objects in the path of sampling equipment or boring apparatus. The sampling/boring location will be moved to avoid subsurface metal objects. The practice of UXO avoidance shall be implemented for all intrusive activities.

If UXO is encountered, personnel will contact the site manager and UXO specialist immediately. Personnel will evacuate the immediate area and secure it.

Table 4-1

**Action Levels
Former 81mm Mortar Range, Parcel 137Q-X
Fort McClellan, Calhoun County, Alabama**

(Page 1 of 2)

When in Level C PPE

Analyte	Action Level	Required Action ^a
VOCs (volatile organic compound)	≥ 10 ppm above background in breathing zone (BZ)	Stop work, evacuate work area, upgrade to Level B; Notify CIH
Dust	>0.5 mg/m ³ above background in BZ	Normal operations, initiate dust control to minimize migration.
LEL (lower explosive limit)	≤ 10 % LEL ≥ 10 % LEL	Normal operations Stop work, identify source

When in Level D Modified/D PPE

Analyte	Action Level	Required Action ^b
VOCs	≥ 1 ppm above background in BZ	Stop activities, suspend work activities for 15 to 30 minutes, if readings are sustained then upgrade to Level C PPE; Notify CIH
Dust	≥ 0.3 mg/m ³ above background in BZ	Stop work, Initiate dust control, upgrade to Level C PPE if dust control is not effective; Notify CIH
LEL (lower explosive limit)	≤ 10 % LEL ≥ 10 % LEL	Normal operations Stop work, identify source. Monitor for VOC's

Table 4-1

**Action Levels
Former 81mm Mortar Range, Parcel 137Q-X
Fort McClellan, Calhoun County, Alabama**

(Page 2 of 2)

When in Support Zone

Analyte	Action Level	Required Action
VOCs	≥ 1 ppm above background in BZ	Evacuate support zone and re-establish perimeter of exclusion zone.
Dust	> 0.3 mg/m ³ above background in BZ	Stop work, Initiate dust control

^a Four instantaneous peaks in any 15-minute period or a sustained reading for 5 minutes in excess of the action level will trigger a response.

^b Contact with the H&S manager must be made prior to continuance of work. The H&S manager may then initiate perimeter/integrated air sampling along with additional engineering controls.

No one is permitted to downgrade levels of PPE without authorization from the H&S manager.

Table 4-2

**Air Monitoring Frequency and Location
Former 81mm Mortar Range, Parcel 137Q-X
Fort McClellan, Calhoun County, Alabama**

Work Activity	Instrument	Frequency	Location
Staging equipment and UXO avoidance sweeps	OV Monitor Miniram	Initially for area Periodically	Breathing zone (BZ) of employees
Sampling (surface soil and subsurface soil)	OV Monitor Miniram LEL/O ₂	Periodically Periodically	BZ of employees BZ of employees

OV = Organic vapor.

Miniram = Aerosol (dust) monitor.

LEL/O₂ = Lower explosive limit/oxygen level.

5.0 Activity Hazard Analysis

The attached activity hazard analysis (Table 5-1) is provided for the following activities:

- Initial UXO avoidance sweep and equipment staging
- Surveying
- Surface and subsurface direct push soil sampling
- Moving and shipping collected samples
- Disposal of investigative derived waste (forklift operations)
- High-pressure water jetting operations.

All injuries and illnesses must be immediately reported to the site manager or the site safety and health officer, who will then notify off-site personnel and organizations as necessary.

If hospital care must be provided, the victim shall be treated at Northeast Regional Medical Center. Directions to the hospital from the Former 81mm Mortar Range, Parcel 137Q-X, are provided in Figure 5-1.

Table 5-1

**Activity Hazard Analysis
Former 81mm Mortar Range, Parcel 137Q-X
Fort McClellan, Calhoun County, Alabama**

(Page 1 of 11)

Activity	Potential Hazards	Recommended Controls
Initial UXO avoidance sweep and equipment staging	Slip, trip, and fall hazards	<ul style="list-style-type: none"> • Determine best access route before transporting equipment. • Practice good housekeeping; keep work area picked up and clean as feasible. • Continually inspect the work area for slip, trip, and fall hazards. • Look before you step; ensure safe and secure footing.
	Heavy lifting	<ul style="list-style-type: none"> • Use proper lifting techniques. Lifts greater than 60 pounds require assistance or mechanical equipment.
	Falling objects	<ul style="list-style-type: none"> • Stay alert and clear of materials suspended overhead; wear hard hat and steel-toed boots.
	Flying debris, dirt, dust, etc.	<ul style="list-style-type: none"> • Wear safety glasses/goggles; ensure that eyewash is in proper working condition.
	Pinch points	<ul style="list-style-type: none"> • Keep hands, fingers, and feet clear of moving/suspended materials and equipment. • Beware of contact points. • Stay alert at all times!
	Cuts/bruises	<ul style="list-style-type: none"> • Use cotton or leather work gloves for material handling.
	Bees, spiders, and snakes	<ul style="list-style-type: none"> • Inspect work area carefully and avoid placing hands and feet into concealed areas.
	Ticks	<ul style="list-style-type: none"> • Wear light colored clothing (can see ticks better). • Mow vegetated and small brush areas. • Wear insect repellent. • Wear long sleeves and long pants. • Visually check oneself promptly and frequently after exiting the work area.
	Fire	<ul style="list-style-type: none"> • Fire extinguishers shall be suitably placed, distinctly marked, readily accessible, and maintained in a fully charged and operable condition.
	Hazard communication	<ul style="list-style-type: none"> • Label all containers as to contents and dispose of properly. • Ensure Material Safety Data Sheets (MSDS) are available for hazardous chemicals used on site.
	Noise	<ul style="list-style-type: none"> • Sound levels above 85 decibels (dBA) mandates hearing protection.
	Lighting	<ul style="list-style-type: none"> • Adequate lighting will be provided to ensure a safe working environment.
UXO	<ul style="list-style-type: none"> • UXO avoidance monitoring will be conducted by a UXO specialist prior to beginning activities. • IF UXO is encountered, cease all activities, mark location, and notify site manager. 	

Table 5-1

**Activity Hazard Analysis
Former 81mm Mortar Range, Parcel 137Q-X
Fort McClellan, Calhoun County, Alabama**

(Page 2 of 11)

Activity	Potential Hazards	Recommended Controls
Initial UXO avoidance sweep and equipment staging (continued)	Cold stress	<ul style="list-style-type: none"> • Workers should wear insulated clothing when temperatures drop below 40 degrees Fahrenheit (°F). • Drink warm beverages on breaks. Refrain from drinking caffeinated beverages. • Remove wet clothing promptly. • Take breaks in warm areas. • Reduce work periods as necessary. • Layer work clothing.
	Poison ivy/oak/sumac	<ul style="list-style-type: none"> • Avoid plant areas if possible. • Wear long sleeves and long pants. • Promptly wash clothing that has contacted poisonous plants. • Wash affected areas immediately with soap and water.
	Heat rash	<ul style="list-style-type: none"> • Keep the skin clean and dry. • Change perspiration-soaked clothing, as necessary. • Bathe at end of work shift or day. • Apply powder to affected area.
	Heat cramps	<ul style="list-style-type: none"> • Drink plenty of cool fluids even when not thirsty. • Provide cool fluid for work crews. • Move victim to shaded, cool area.
	Heat exhaustion	<ul style="list-style-type: none"> • Conduct physiological worker monitoring as needed (i.e., heart rate, oral temperature). • Set up work/rest periods. • Use the "buddy system." • Allow workers time to acclimate. • Have ice packs available for use. • Take frequent breaks.

Table 5-1

**Activity Hazard Analysis
Former 81mm Mortar Range, Parcel 137Q-X
Fort McClellan, Calhoun County, Alabama**

(Page 3 of 11)

Activity	Potential Hazards	Recommended Controls
Initial UXO avoidance sweep and equipment staging (continued)	Heat stroke	<ul style="list-style-type: none"> • Evaluate possibility of night work. • Perform physiological monitoring on workers during breaks. • Wear body cooling devices.
	Contact with moving equipment/vehicles	<ul style="list-style-type: none"> • Work area will be barricaded/demarcated. • Equipment will be laid out in an area free of traffic flow. • Barricades shall be used on or around work areas when it is necessary to prevent the inadvertent intrusion of pedestrian traffic. • Barriers shall be used to protect workers from vehicular traffic. • Barriers shall be used to guard excavations adjacent to streets or roadways. • Flagging shall be used for the short term (less than 24 hours) to identify hazards until proper barricades or barriers are provided. • Heavy equipment shall have backup alarms.
	Forklift operations	<ul style="list-style-type: none"> • Use qualified and trained forklift operators. • The operator shall not exceed the load capacity rating for the forklift. • The load capacity shall be clearly visible on the forklift. • Forklift operators shall inform their supervisor of any prescribed medication that they are taking that would impair their judgement.
	Portable electric tools	<ul style="list-style-type: none"> • Portable electric tools that are unsafe due to faulty plugs, damaged cords, or other reasons, shall be tagged (do not use) and removed from service. • Portable electric tools and all cord and plug connected equipment shall be protected by a ground-fault circuit interrupter (GFCI) device. • Electrical tools shall be inspected daily prior to use.

Table 5-1

**Activity Hazard Analysis
Former 81mm Mortar Range, Parcel 137Q-X
Fort McClellan, Calhoun County, Alabama**

(Page 4 of 11)

Activity	Potential Hazards	Recommended Controls
Initial UXO avoidance sweep and equipment staging (continued)	Extension cords	<ul style="list-style-type: none"> • Extension cords that have faulty plugs, damaged insulation, or are unsafe in any way shall be removed from service. • Cords shall be protected from damage from sharp edges, projections, pinch points (doorways), and vehicular traffic. • Cords shall be suspended with a nonconductive support (rope, plastic ties, etc.). • Cords shall be designed for hard duty. • Cords shall be inspected daily.
	Lightning strikes	<ul style="list-style-type: none"> • Whenever possible, get away from elevated locations (i.e., roofs, ladders, equipment), halt activities and take cover. • Limit the body surface area that is in contact with the ground (i.e., kneeling on one knee is better than lying on the ground). • Seek shelter in a building if possible. • Stay away from windows. • If available, crouch under a group of trees instead of one. • Remain 6 feet away from tree trunk if seeking shelter beneath tree(s). • If in a group, keep 6 feet of distance between people.
	Thunderstorms, tornados	<ul style="list-style-type: none"> • Listen to radio or TV announcements for pending weather information. • Cease field activities during thunderstorm or tornado warnings. • Seek shelter. Do not try to outrun a tornado.
Surveying	Slip, trip, and fall hazards	<ul style="list-style-type: none"> • Site workers will be required to wear hard hat, safety glasses with side shields, work gloves, and steel-toe boots when working in the field. • Provide adequate lighting in all work areas. • Whenever possible, avoid routing cords and hoses across walking pathways. • Flag or cover inconspicuous holes to protect against falls. • Work areas will be kept clean and orderly. • Garbage and trash will be disposed of daily in approved refuse containers. • Tools and accessories will be properly maintained and stored. • Work areas and floors will be kept free of dirt, grease, and slippery materials.

Table 5-1

**Activity Hazard Analysis
Former 81mm Mortar Range, Parcel 137Q-X
Fort McClellan, Calhoun County, Alabama**

(Page 5 of 11)

Activity	Potential Hazards	Recommended Controls
Surveying (continued)	Traffic accidents	<ul style="list-style-type: none"> • Place physical barrier (i.e., barricades, fencing) around work areas regularly occupied by pedestrians. • If working adjacent to roadways, have workers wear fluorescent orange vests. • Use warning signs or lights to alert oncoming traffic. • Assign flag person(s) if necessary to direct local traffic. • Set up temporary parking locations outside the immediate work area. • Motor vehicle operators shall obey all posted traffic signs, signals, and speed limits. • Pedestrians have the right-of-way. • Wear seat belts when vehicles are in motion.
	Wildlife hazards	<ul style="list-style-type: none"> • Workers should be cautious when driving through the site in order to avoid encounters with passing animals.
	Biological hazards	<ul style="list-style-type: none"> • Walking through overgrown grass areas, watch for snakes (rattlesnakes, moccasins, copperheads).
	Ticks	<ul style="list-style-type: none"> • Wear light colored clothing (can see ticks better). • Mow vegetated and small brush areas. • Wear insect repellent. • Wear long sleeves and long pants. • Visually check oneself promptly and frequently after exiting the work area.
	Poison ivy/oak/sumac	<ul style="list-style-type: none"> • Avoid plant areas if possible. • Wear long sleeves and long pants. • Promptly wash clothing that has contacted poisonous plants. • Wash affected areas immediately with soap and water.
	UXO	<ul style="list-style-type: none"> • UXO avoidance monitoring will be conducted by a UXO specialist prior to beginning activities. • If UXO is encountered, cease all activities, mark the location, and notify the site manager.

Table 5-1

**Activity Hazard Analysis
Former 81mm Mortar Range, Parcel 137Q-X
Fort McClellan, Calhoun County, Alabama**

(Page 6 of 11)

Activity	Potential Hazards	Recommended Controls
Surface and Subsurface Direct Push Soil Sampling	Overhead hazards	<ul style="list-style-type: none"> • Make sure no obstacles are within radius of boom. Always stay a safe distance from power lines.
	Faulty or damaged equipment being utilized to perform work	<ul style="list-style-type: none"> • All machinery or mechanized equipment will be inspected by a competent mechanic and be certified to be in safe operating condition. • Equipment will be inspected before being put to use and at the beginning of each shift. • Faulty/unsafe equipment will be tagged and if possible locked out. • Drill rigs shall be equipped with reverse signal alarm, backup warning lights, or the vehicle is backed up only when an observer signals it is safe to do so.
	Uneven terrain, poor ground support, inadequate clearances, contact with utilities	<ul style="list-style-type: none"> • Inspections or determinations of road conditions and structures shall be made in advance to ensure that clearances and load capacities are safe for the passage or placing of any machinery or equipment. • All mobile equipment and areas in which they are operated shall be adequately illuminated. • Aboveground and below ground utilities will be located prior to staging equipment. • Whenever the equipment is parked, the parking brake shall be set. • Equipment parked on inclines will have the wheels chocked. • Inspect brakes and tire pressure on drill rig before staging for work.
	Inexperienced operator	<ul style="list-style-type: none"> • Machinery and mechanized equipment shall be operated only by designated personnel. • Operators shall inform their supervisor(s) of any prescribed medication that they are taking that would impair their judgment.
	Jacks/outriggers	<ul style="list-style-type: none"> • Ensure proper footing and cribbing.
	Falling objects	<ul style="list-style-type: none"> • Remove unsecured tools and materials before raising or lowering the derrick. • Stay alert and clear of materials suspended overhead.
	Pinch points	<ul style="list-style-type: none"> • Keep feet and hands clear of moving/suspended materials and equipment. • Stay alert at all times!

Table 5-1

**Activity Hazard Analysis
Former 81mm Mortar Range, Parcel 137Q-X
Fort McClellan, Calhoun County, Alabama**

(Page 7 of 11)

Activity	Potential Hazards	Recommended Controls
Surface and Subsurface Direct Push Soil Sampling (continued)	Fire	<ul style="list-style-type: none"> • Mechanized equipment shall be shut down prior to and during fueling operations. • Have fire extinguishers inspected and readily available.
	Fall hazards	<ul style="list-style-type: none"> • Personnel are not allowed to work off machinery or use them as ladders. • Use fall protection when working above 6 feet.
	Contact with rotating or reciprocating machine parts	<ul style="list-style-type: none"> • Use machine guards; use long-handled shovels to remove auger cuttings. • Safe lockout procedures for maintenance work.
	Heavy lifting	<ul style="list-style-type: none"> • Use proper lifting techniques. Lifts greater than 60 pounds require assistance or mechanical equipment; size up the lift.
	Slip, trip, and fall hazards	<ul style="list-style-type: none"> • Practice good housekeeping, keep work area picked up and clean as feasible. • Continually inspect the work area for slip, trip, and fall hazards.
	Contact with potentially contaminated materials	<ul style="list-style-type: none"> • Real-time air monitoring will take place. If necessary, proper personal protective clothing and equipment will be utilized. • Stop immediately at any sign of obstruction. • Do not breathe air surrounding the boring unless necessary. • Upgrade to respirator if necessary and avoid skin contact with soil cuttings. Wear gloves. • Stay clear of moving parts of rig.
	Drum handling	<ul style="list-style-type: none"> • Be careful not to breathe air from around open drum any more than necessary. Monitor with photoionization detector/flame ionization detector (PID/FID) equipment and upgrade to respirator if necessary. • When filling a drum (with either soil or water), be careful not to make contact with the contained waste. Wear appropriate gloves. Make sure lid or bung of drum is secure. • If moving a drum unassisted, be sure to leverage properly, use proper lifting techniques, and wear safety glasses and steel-toed boots. • When using a drum dolly, make sure straps and lid catch is securely attached. Leverage properly when tilting drum. Be sure toes stay away from drum.

Table 5-1

**Activity Hazard Analysis
Former 81mm Mortar Range, Parcel 137Q-X
Fort McClellan, Calhoun County, Alabama**

(Page 8 of 11)

Activity	Potential Hazards	Recommended Controls
Surface and Subsurface Direct Push Soil Sampling (continued)	Cross-contamination and contact with potentially contaminated materials	<ul style="list-style-type: none"> • Stop immediately at any sign of obstruction. • Sampling technicians will wear proper protective clothing and equipment to safeguard against potential contamination. • Only essential personnel will be in the work area. • Real-time air monitoring will take place before and during sampling activities. • All personnel will follow good hygiene practices. • Proper decontamination procedures will be followed. • All liquids and materials used for decontamination will be contained and disposed of in accordance with federal, state, and local regulations.
	UXO	<ul style="list-style-type: none"> • UXO avoidance monitoring will be conducted by a UXO specialist prior to beginning activities. • If UXO is encountered, cease all activities, mark the location, and notify the site manager and UXO specialist.
	Cut hazards	<ul style="list-style-type: none"> • Use care when handling glassware. • Wear adequate hand protection.
Moving and Shipping Collected Samples	Heavy lifting	<ul style="list-style-type: none"> • Use proper lifting techniques. Lifts greater than 60 pounds require assistance or mechanical equipment; size up the lift.
	Pinch points	<ul style="list-style-type: none"> • Keep hands, fingers, and feet clear of moving/suspended materials and equipment. • Beware of contact points. • Stay alert at all times!
	Cut hazards	<ul style="list-style-type: none"> • Wear adequate hand protection. Use care when handling glassware.
	Hazard communication	<ul style="list-style-type: none"> • Label all containers as to contents and associated hazards.
	Heavy lifting	<ul style="list-style-type: none"> • Use proper lifting techniques. Lifts greater than 60 pounds require assistance or mechanical equipment; size up the lift.

Table 5-1

**Activity Hazard Analysis
Former 81mm Mortar Range, Parcel 137Q-X
Fort McClellan, Calhoun County, Alabama**

(Page 9 of 11)

Activity	Potential Hazards	Recommended Controls
Material Storage	Flammable and combustible liquids	<ul style="list-style-type: none"> • Store in NO SMOKING AREA. • Fire extinguisher readily available. • Transfer only when properly grounded and bonded.
Disposal of Investigation-Derived Waste (IDW) (Forklift Operation)	Personnel injury, property damage, and/or equipment damage	<ul style="list-style-type: none"> • Use qualified and trained forklift operators. • The operator shall not exceed the load capacity rating for the forklift. • The load capacity shall be clearly visible on the forklift. • Forklift operators shall inform their supervisor of any prescribed medication that they are taking that would impair their judgement.
	Cross-contamination and contact with potentially contaminated materials	<ul style="list-style-type: none"> • Stop immediately at any sign of obstruction. • Sampling technicians will wear proper protective clothing and equipment to safeguard against potential contamination. • Only essential personnel will be in the work area. • Real-time air monitoring will take place before and during sampling activities. • All personnel will follow good hygiene practices. • Proper decontamination procedures will be followed. • All liquids and materials used for decontamination will be contained and disposed of in accordance with federal, state, and local regulations.
	Cut hazards	<ul style="list-style-type: none"> • Use care when handling glassware. • Wear adequate hand protection.
High-Pressure Water Jetting Operations	Heavy lifting	<ul style="list-style-type: none"> • Use proper lifting techniques. • Lifts greater than 60 pounds require assistance or mechanical equipment; size up the lift.
	Slip, trip, and fall hazards	<ul style="list-style-type: none"> • Good housekeeping shall be implemented. • The work area shall be kept clean as feasible. • Inspect the work area for slip, trip, and fall hazards.

Table 5-1

**Activity Hazard Analysis
Former 81mm Mortar Range, Parcel 137Q-X
Fort McClellan, Calhoun County, Alabama**

(Page 10 of 11)

Activity	Potential Hazards	Recommended Controls
High-Pressure Water Jetting Operations (continued)	Fueling	<ul style="list-style-type: none"> • Only approved safety cans shall be used to store fuel. • Do not refuel equipment while it is operating. • Fire extinguishers shall be suitably placed, distinctly marked, readily accessible, and maintained in a fully charged and operable condition.
	Faulty or damaged equipment	<ul style="list-style-type: none"> • Equipment shall be inspected before being placed into service and at the beginning of each shift. • Preventive maintenance procedures recommended by the manufacturer shall be followed. • A lockout/tagout procedure shall be used for equipment found to be faulty or undergoing maintenance.
	High-pressure water	<ul style="list-style-type: none"> • Jetting gun operator must wear appropriate PPE including hard hat, impact-resistant safety glasses with side shields, water-resistant clothing, metatarsal guards for feet and legs, and hearing protection (if appropriate). • One standby person shall be available within the vicinity of the pump during jetting operation. • The work area shall be isolated and adequate barriers will be used to warn other site personnel.
	Unqualified operators	<ul style="list-style-type: none"> • Only qualified and trained personnel are permitted to operate machinery and mechanized equipment associated with water jet cutting and cleaning.
	Out of control equipment	<ul style="list-style-type: none"> • No machinery or equipment is permitted to run unattended. • Machinery or equipment will not be operated in a manner that will endanger persons or property nor will the safe operating speeds or loads be exceeded.
	Noise	<ul style="list-style-type: none"> • Sound levels above 85 dBA mandates hearing protection by nearby site personnel.
	Activation during repairs	<ul style="list-style-type: none"> • All machinery or equipment will be shut down and positive means taken to prevent its operation while repairs or manual lubrications are being done.
	Pinch points	<ul style="list-style-type: none"> • Keep feet and hands clear of moving/suspended materials and equipment. • Stay alert and clear of materials suspended .
	Falling objects	<ul style="list-style-type: none"> • Hard hats are required by site personnel. • Stay alert and clear of material suspended overhead.
	Flying debris	<ul style="list-style-type: none"> • Impact-resistant safety glasses with side shields are required.


Table 5-1

**Activity Hazard Analysis
Former 81mm Mortar Range, Parcel 137Q-X
Fort McClellan, Calhoun County, Alabama**

(Page 11 of 11)

Activity	Potential Hazards	Recommended Controls
High-Pressure Water Jetting Operations (continued)	Contact with potentially contaminated materials	<ul style="list-style-type: none">• All site personnel will wear the appropriate PPE.

DWG. NO.: ...796887es.328
 PROJ. NO.: 796887
 PROJ. MGR.: J. YACOUB
 DRAFT. CHK. BY: S. MORAN
 ENGR. CHK. BY: S. MORAN
 DATE LAST REV.:
 DRAWN BY: D. BOWMAR
 STARTING DATE: 02/06/02
 DRAWN BY: D. BOWMAR
 09:39:30 AM
 DBILLING
 c:\cadd\design\796887es.328

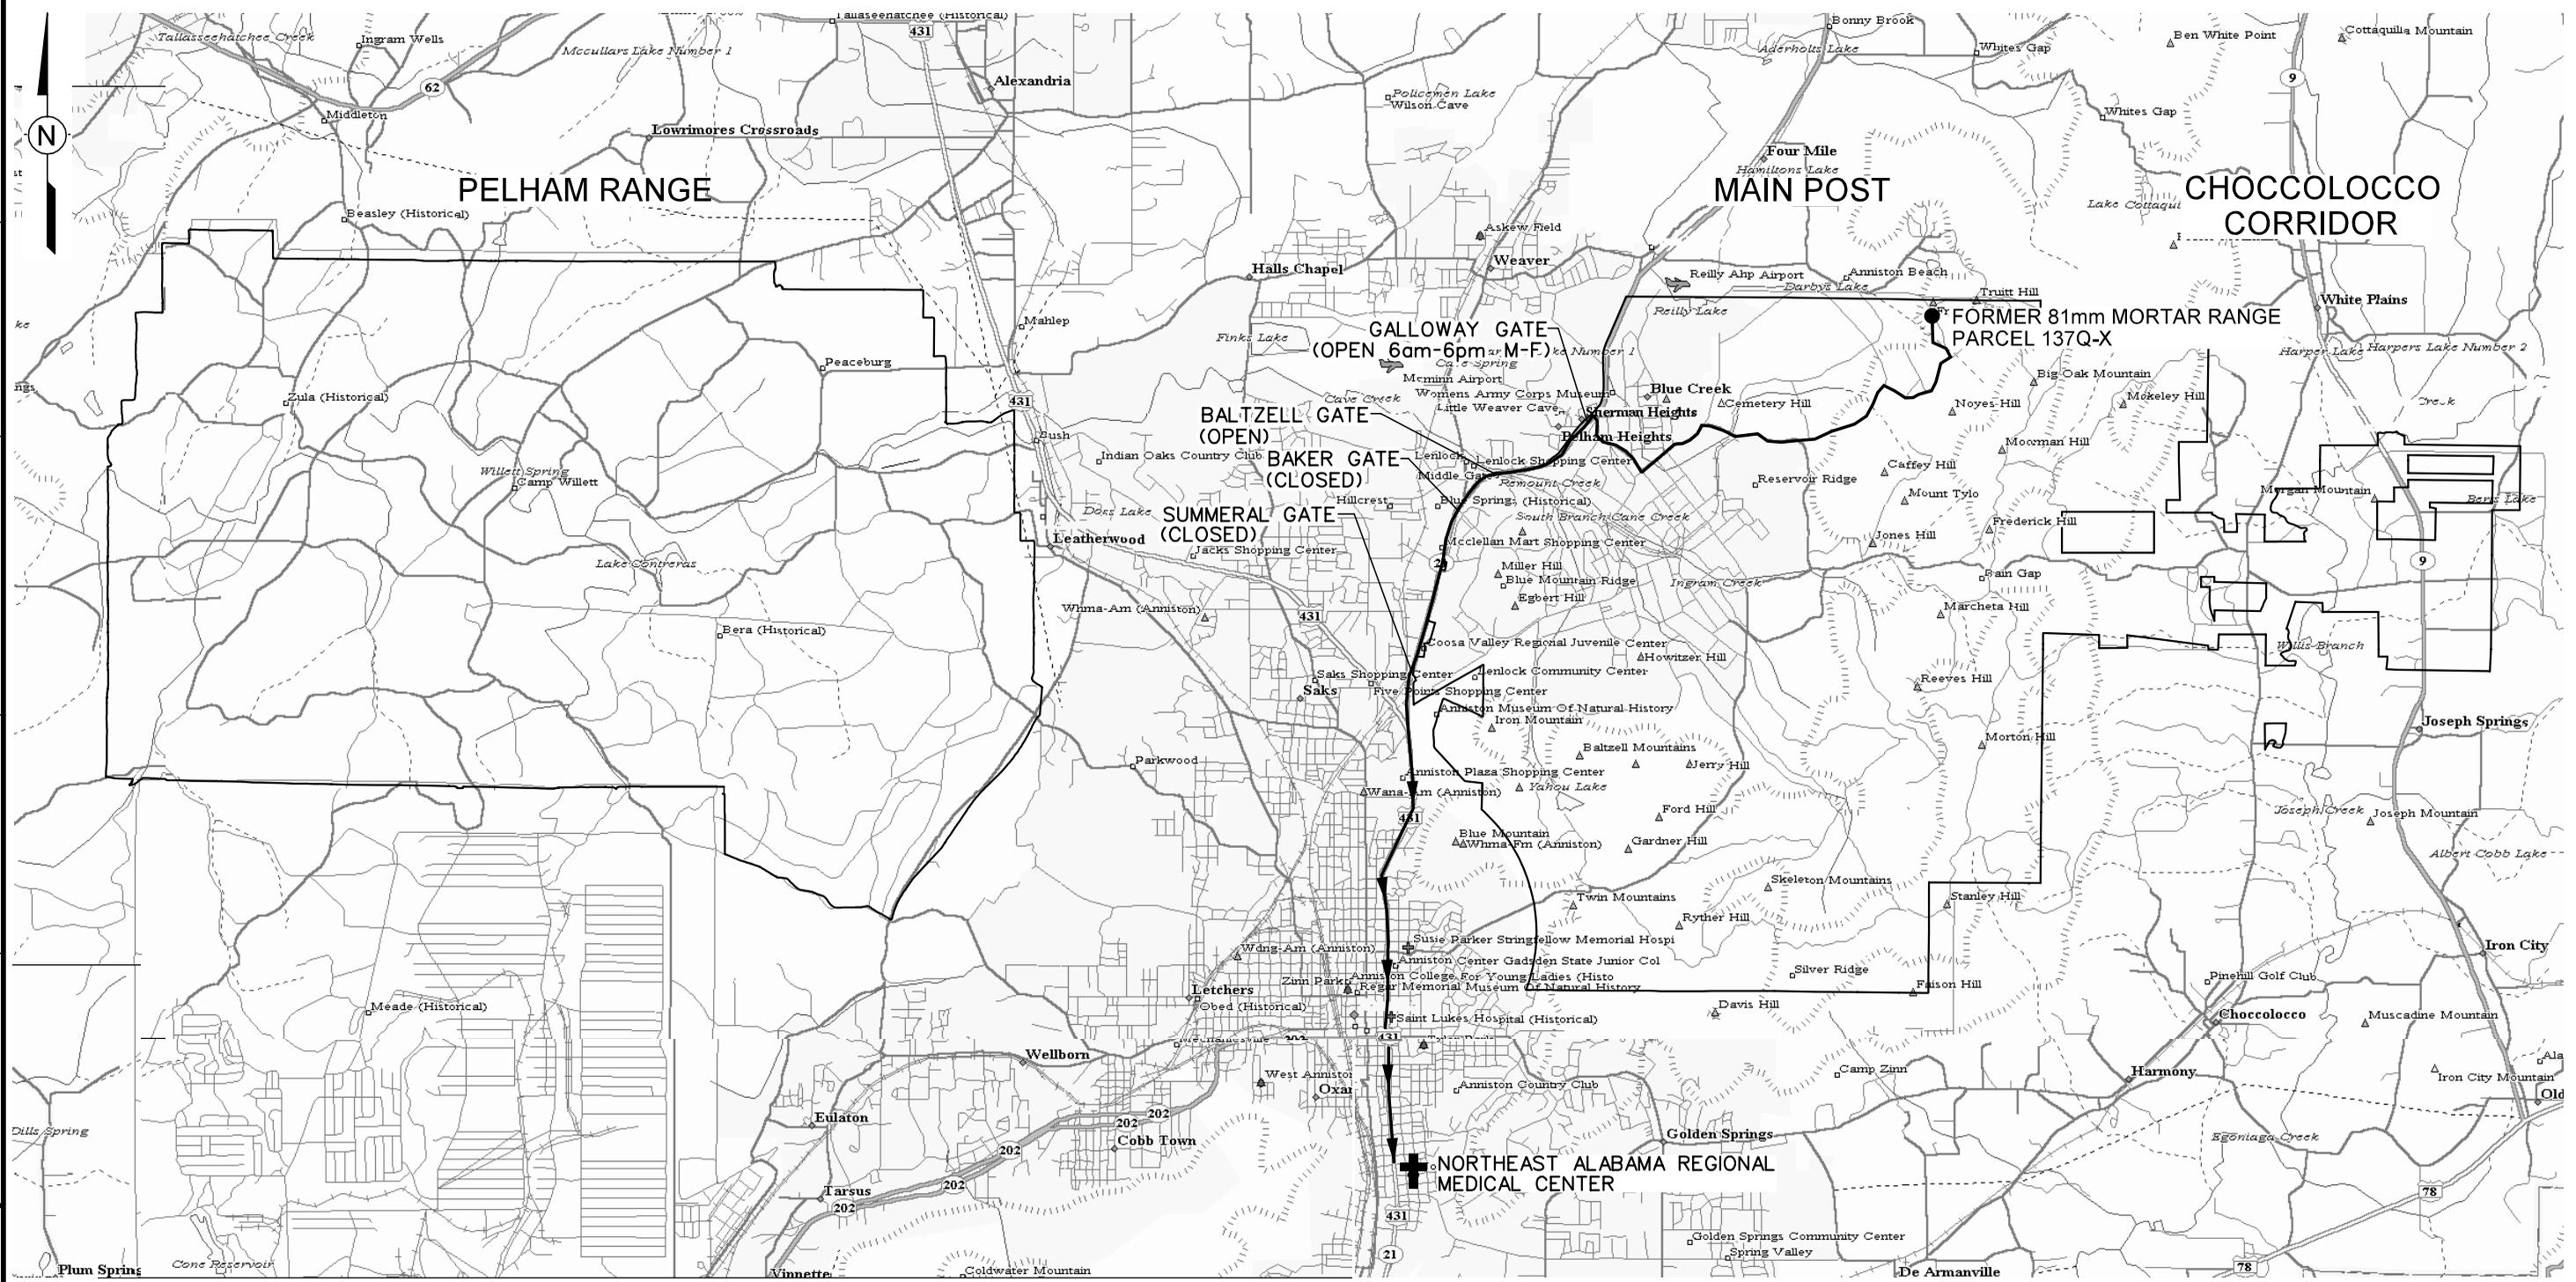

LEGEND:


-  ROUTE TO NORTHEAST ALABAMA REGIONAL MEDICAL CENTER
-  U.S. HIGHWAY
-  HOSPITALS
-  INVESTIGATION SITE

DRIVING DIRECTIONS FROM BALTZELL GATE ROAD TO THE NORTHEAST ALABAMA MEDICAL CENTER

- LEAVING FORT MCCLELLAN ON BALTZELL GATE ROAD, TURN LEFT (SOUTH) ONTO AL HWY 21
- GO ~ 2.5 MILES WHERE AL HWY 21 MERGES WITH U.S. HWY 431 AND CONTINUE SOUTH
- CONTINUE SOUTH ON AL21/US431 FOR ~ 2.7 MILES
- TURN LEFT ONTO EAST 10th STREET
- GO ~ 0.2 MILE TO MEDICAL CENTER ON RIGHT
- NORTHEAST ALABAMA REGIONAL MEDICAL CENTER, 400 EAST 10th STREET
- PHONE NUMBER : (256) 235-5121

**FIGURE 5-1
HOSPITAL EMERGENCY ROUTE**

U. S. ARMY CORPS OF ENGINEERS
 MOBILE DISTRICT
 FORT McCLELLAN
 CALHOUN COUNTY, ALABAMA
 Contract No. DACA21-96-D-0018



ATTACHMENT 1

**EVALUATING OE/UXO/CWM HAZARDS IN SUPPORT
OF HTRW ACTIVITIES**

Site Name: Former 81mm Mortar Range, Parcel 137Q-X

Job Number: 796887

Date: 20-Mar-02

Name of person completing form: Leslie O'Hare

Title: Plan Writer

Signature: _____

<p>1a. Have the historical records available for this HTRW site been reviewed?</p> <p>If the answer to 1a. is yes, proceed to 1b. If the answer to 1a. is no, review site information prior to completing this form.</p>	<table> <tr> <td>Yes</td> <td>No</td> </tr> <tr> <td><input checked="" type="checkbox"/></td> <td><input type="checkbox"/></td> </tr> </table>	Yes	No	<input checked="" type="checkbox"/>	<input type="checkbox"/>
Yes	No				
<input checked="" type="checkbox"/>	<input type="checkbox"/>				

<p>1b. Is there recent information (site walk, worker interviews, etc.) that indicates a potential OE/CWM hazard at this site?</p> <p>Proceed to 2.</p>	<table> <tr> <td>Yes</td> <td>No</td> </tr> <tr> <td><input checked="" type="checkbox"/></td> <td><input type="checkbox"/></td> </tr> </table>	Yes	No	<input checked="" type="checkbox"/>	<input type="checkbox"/>
Yes	No				
<input checked="" type="checkbox"/>	<input type="checkbox"/>				

2. According to the records review, is this site known or suspected to have been used for:

	Yes	No
2a. Manufacturing, production, or shipping of conventional or chemical warfare materiel (CWM) OE:	<input type="checkbox"/>	<input checked="" type="checkbox"/>
Live fire testing of any ordnance:	<input checked="" type="checkbox"/>	<input type="checkbox"/>
Conventional or CWM OE training:	<input type="checkbox"/>	<input checked="" type="checkbox"/>
Storage of conventional or CWM OE:	<input type="checkbox"/>	<input checked="" type="checkbox"/>
Disposal or demilitarization of conventional or CWM OE:	<input type="checkbox"/>	<input checked="" type="checkbox"/>
Other (specify):		

	Yes	No
2b. Manufacturing, production, or shipping of chemical agent:	<input type="checkbox"/>	<input checked="" type="checkbox"/>
Research or testing of chemical agent:	<input type="checkbox"/>	<input checked="" type="checkbox"/>
Chemical agent related training:	<input checked="" type="checkbox"/>	<input type="checkbox"/>
Storage of chemical agent:	<input type="checkbox"/>	<input checked="" type="checkbox"/>
Disposal or demilitarization of chemical agent:	<input type="checkbox"/>	<input checked="" type="checkbox"/>
Other (specify):		

Any **2a** question answered "YES" indicates UXO support is required for all site activities. If all **2a** questions are answered "NO", UXO support may not be required. Refer to Installation-Wide Safety and Health Plan (SHP) for additional information concerning UXO support. Proceed to question **2b**.

Any **2b** question answered "YES" requires the remainder of this form to be completed. If all **2b** questions are answered "NO", real-time monitoring for chemical agent will not be required and completing the remainder of this form is not required. Refer to SHP for additional information concerning agent monitoring.

Additional space for notes and explanations on page 4.
Continue to page 2 of 4 –

Site Name: Former 81mm Mortar Range, Parcel 137Q-X

Job Number: 796887

Date: 20-Mar-02

3. For sites where the manufacturing, testing, storage, or disposal of CWM is suspected:	Yes	No
Is there evidence that the CWM is/was containerized in potentially unexploded ordnance:	<input type="checkbox"/>	<input checked="" type="checkbox"/>
Is there evidence that the CWM is/was containerized in nonexplosive containers:	<input type="checkbox"/>	<input checked="" type="checkbox"/>
Is there evidence that the CWM is open to the environment (i.e., in an open container or free liquid/solid in the soil/water):	<input type="checkbox"/>	<input checked="" type="checkbox"/>
Is there evidence that the CWM hazard has been removed from the site or that the site has been decontaminated:	<input checked="" type="checkbox"/>	<input type="checkbox"/>
Has the site been previously monitored or sampled for chemical agent or agent breakdown products:	<input type="checkbox"/>	<input checked="" type="checkbox"/>
For any "YES" above, was the agent or breakdown product identified?	<input type="checkbox"/>	<input checked="" type="checkbox"/>

For any "Yes", list types of agent (mustard, lewisite, etc.) and the form (in ordnance, in drum, etc.) the CWM is expected to be found (or state "unknown"):

Based on the positive identification of supertropical bleach (STB) drums in the trench, there is potential for CWM training to have occurred at this site; however, there is no other evidence to confirm CWM training occurred at Parcel 137Q-X.

List agent breakdown products identified:

4. Defining the Potential for the Presence of CWM:	Agent Monitoring Requirements for Site Activities:
4a. High Presence Potential – Definition: CWM is known or highly suspected to be present at the site in a condition (within ordnance and/or nonexplosive container, or in an uncontainerized form in sufficient volume that weathering of the product has not rendered it harmless) that will cause potential harm to personnel if it is encountered.	Mandatory personal and perimeter air monitoring using the DAAMS, MINICAMS, and RTAP collection/analysis methods with off-site surety laboratory confirmation of all environmental samples. Specific monitoring criteria (equipment types and sampling station placement, percentage of personnel monitored, etc.) to be established in the Site Specific Safety and Health Plan (SSHP).
4b. Moderate Presence Potential - Definition: CWM is suspected to have been present at the site, but has been previously removed and/or decontaminated, or has been open to the environment such that it is expected to have degraded and been rendered harmless.	The need for personal and perimeter air monitoring using the DAAMS, MINICAMS, and RTAP collection/analysis methods with off-site surety laboratory confirmation of all environmental samples will be reviewed on a site-by-site basis. Specific monitoring criteria (equipment types and sampling station placement, percentage of personnel monitored, etc.) to be established in the Site Specific Safety and Health Plan (SSHP).
4c. Low Presence Potential – Definition: No indications that CWM will be present in quantity or reactivity (in munitions, projectiles, drums, etc.).	No specific personal or area monitoring for chemical agents required beyond what is specified in the SHP.

Continue to page 3 of 4 -

Site Name: Former 81mm Mortar Range, Parcel 137Q-X

Job Number: 796887

Date: 31-Jan-02

Based on the information available for this site, including information gathered during completion of this form, the potential for CWM to be present at this site, as defined above, is expected to be: **LOW**

Exceptions/Explanations:

(additional space for notes and explanations on page 4)

5. Based on the information provided in questions 1 through 5, above, the following guidelines will be used for establishing PPE requirements for activities to be performed at this site; Specific details are provided in the SSHP:


<p>5a. High Exposure Potential - High exposure potential is determined by evaluating the potential presence of CWM in conjunction with the task(s) to be performed, as well as the specific location and duration of the task(s).</p>	<p>Subject to review by the IT CIH, PPE for all personnel in the exclusion zone at a site identified as having a "High Exposure Potential" will be Level B (supplied air) or Level C (full-face respirator with HEPA/Acid Gas/OV cartridges w/ emergency egress hood) and chemically resistant coveralls. Specific PPE requirements are in the SSHP for this site.</p>
<p>5b. Moderate Exposure Potential - Moderate exposure potential is determined by evaluating the potential presence of CWM in conjunction with the task(s) to be performed, as well as the specific location and duration of the task(s).</p>	<p>Subject to review by the IT CIH, PPE for all personnel in the exclusion zone at a site identified as having a "Moderate Exposure Potential" will be Modified Level D (disposable coveralls and emergency egress hood) carried by all personnel. Specific PPE requirements are in the SSHP for this site.</p>
<p>5c. Low Exposure Potential - Low exposure potential is determined by evaluating the potential presence of CWM in conjunction with the task(s) to be performed, as well as the specific location and duration of the task(s).</p>	<p>Subject to review by the IT CIH, no additional PPE requirements above those stated in the SSHP are needed for sites identified as having "Low Exposure Potential." Specific PPE requirements are in the SSHP for this site.</p>

Based on all available information, the exposure potential at this site is considered to be: **LOW**

Exceptions/Explanations:

Review Signatures:


IT UXO Technical Manager

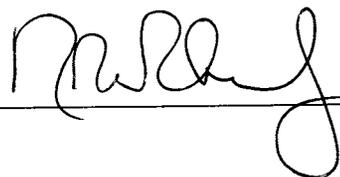

Date:

1 FEB 02

IT H&S Specialist

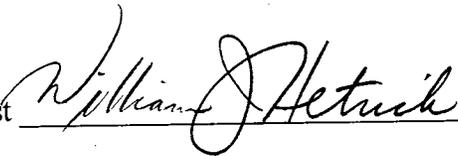

Date:

4/1/02

Site Name: Former 81mm Mortar Range, Parcel 137Q-X

Job Number: 796887

Date: 20-Mar-02

Additional Notes and Explanations:

The Former 81mm Mortar Range, Parcel 137Q-X is located in the northern corner of the Main Post at FTMC. According to the Environmental Baseline Survey (EBS), the range was identified by the Environmental Photographic Interpretation Center (EPIC), and visible on aerial photos dated 1949, 1954, and 1961. The aerial photos from 1972 and 1984, show the range is overgrown and abandoned (Environmental Science and Engineering [ESE], 1998).

The Former 81mm Mortar Range, Parcel 137Q-X, is shown on Plate 6 (1950 to 1973 Range Use) and Plate 10 (Cumulative Map of All Ranges) of the U.S. Army Corps of Engineers July 1999 Archives Search Report (ASR), Maps, Fort McClellan, Anniston, Alabama. The ASR records that the range first appears on the 1958 range map but that by 1967 the range was abandoned. The history of explosive ordnance used at the Former 81mm Mortar Range, Parcel 137Q-X is unknown; however, an expended 81mm high explosive mortar round was found on the range during the site visit (U.S. Army Corp of Engineers, 1999). The ASR did not identify the location of the mortar. The ASR maps indicate the safety fan for the range extends to the south and southeast, encompassing approximately 960 acres on the Main Post, and extending an additional 180 acres into the Choccolocco Corridor Area. Within the safety fan, the site investigation area covers approximately 41 acres of the range.

During site walks conducted by IT personnel in January 2002, an east-west trending trench approximately 900 feet long was observed running between the secondary roads that bound the site to the east and west. Within the trench were numerous surface features including several one- to- five gallon drums, metal debris, and circular pits. In the vicinity of the trench were rusted subtropical bleach drums (positively identified), possible showerheads, possible gas cans, and rusted truck beds. A rusted truck that appeared to have been used for small arms target practice was observed in the southwest corner of the site. Along the western-most unimproved road were one- to- five gallon drums (some ribbed) and a rusted truck bed. In the southeast portion of the site, near the western edge of the trench were several surface depressions that appeared to be foxholes.

STB is an agent used for decontamination of chemical warfare material (CWM). Based on the positive identification of STB drums in the trench, there is potential for CWM training to have occurred at this site. However, there is no other evidence to confirm that CWM training occurred or CWM was ever present.